




Innovative into the Future – BOY-Injectioneering

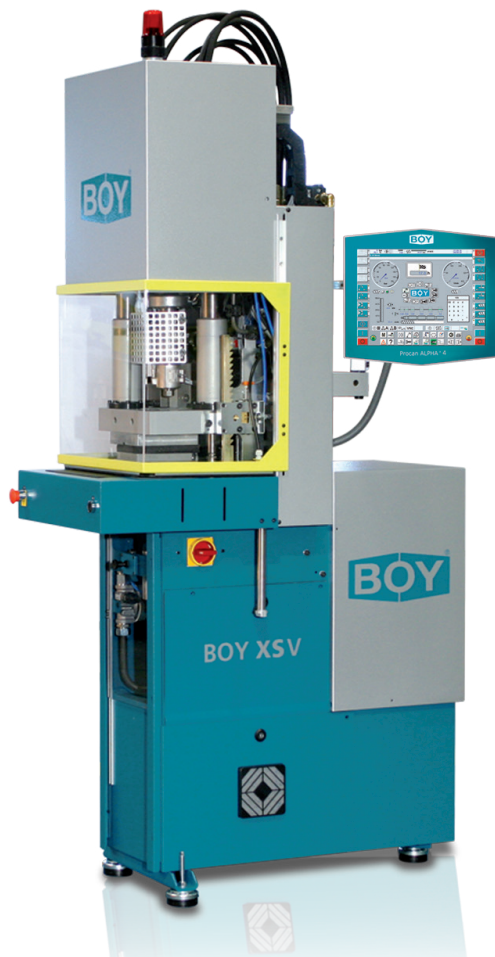


Insert moulding machine BOY XS V

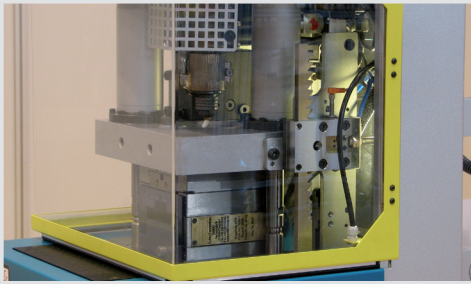

Diagonally arranged tie bars facilitate the installation also of larger moulds

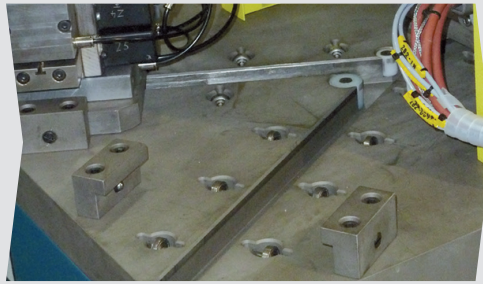

Manual sliding table (e.g. with linear or Y-axis)

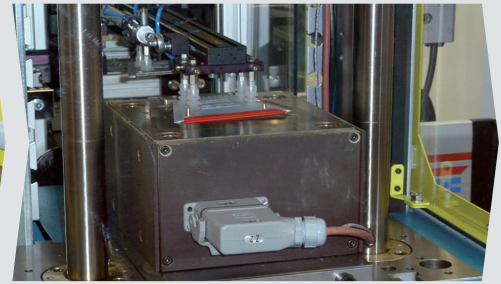


Automated insertion/removal of overmoulded parts from the rear machine table

- Maximum performance in smallest space
- Ultra-compact insert moulding machine with diagonally arranged tie bars.
- The fixed lower platen inhibits a shifting of the insert parts during mould closing
- Best possibilities for inserting and evacuating the parts
- Extremely low space requirement (0.64 m²)

The basic concept of the BOY XS V is identical to the BOY XS, except the injection and clamping units are **arranged vertically**.

The clamping unit features two **diagonally** arranged tie bars, which ensures easy access to the mould area.




Highly precise applications, smallest dimensions as well as much **free space** for peripheral devices are the decisive advantages of the BOY XS V.


The free machine table behind the injection unit can be used for the positioning of **automation equipment**. Different feeding and removal automations can be integrated space saving and without additional space requirement (see following picture).



It is powerful in **industrial continuous operation** and optimally suitable for fully automatic insert moulding of insert parts and integration into production lines.

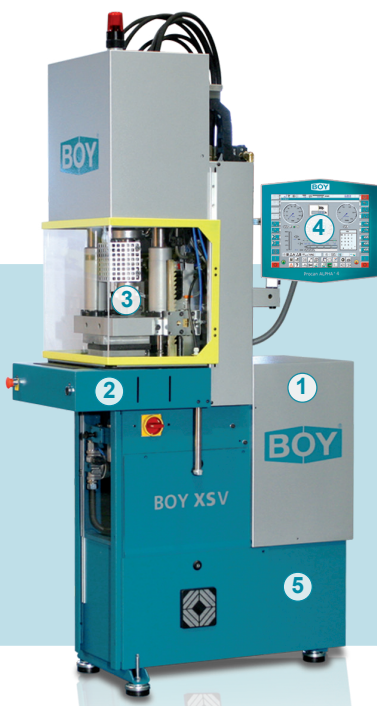

- 1 The machine design features the best ergonomics and efficient operation.
- 2 The fixed lower platen is characteristic for all BOY insert moulding machines. This prohibits shifting of inserted parts during closing and opening of the mould.
- 3 Diagonally arranged tie bars facilitate the installation also of larger moulds.
- 4 Optimum control technology with intuitive operation concept.
- 5 Robust machine design with integrated oil tank.

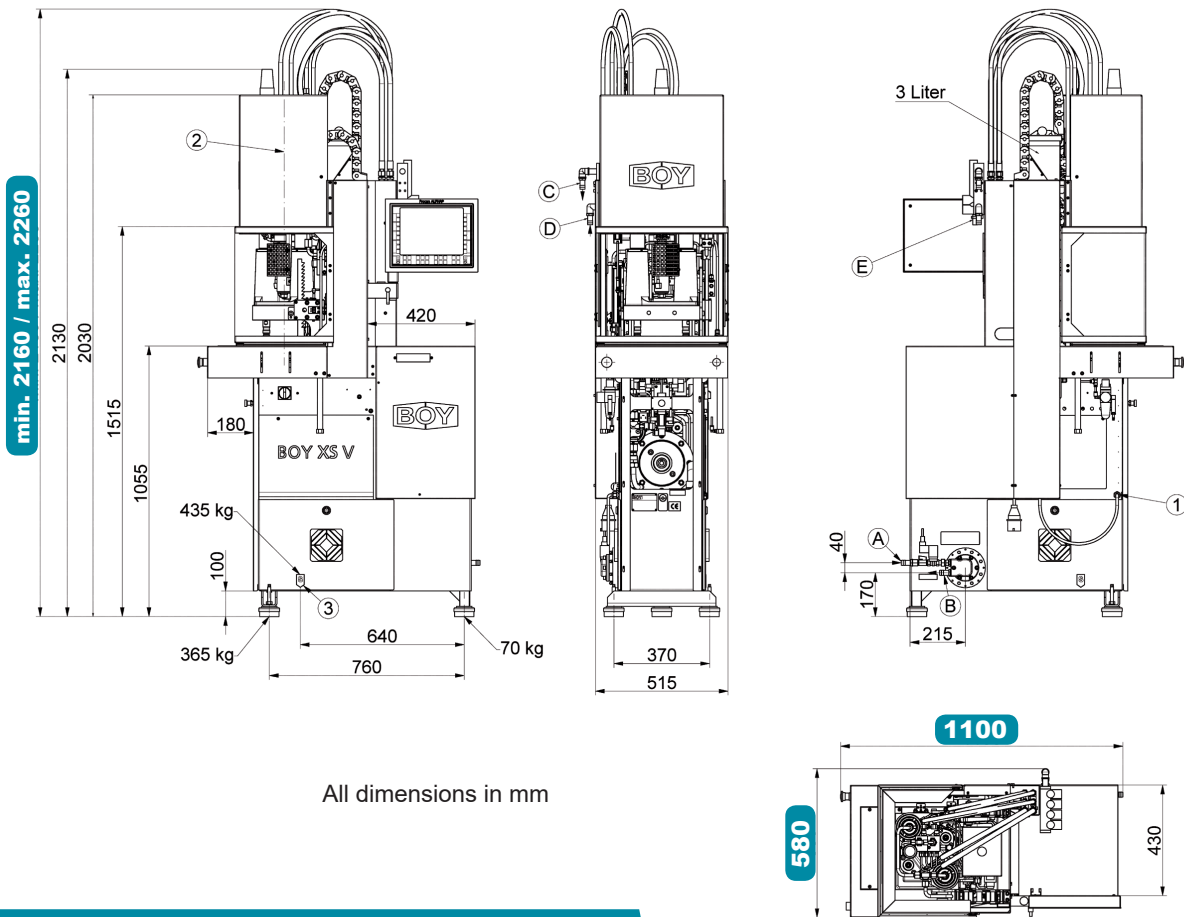

All dimensions in mm

Technical Data – standard version

Injection unit for processing thermoplastics		SP 3 ¹		SP 14	
Screw diameter	mm / inch	8 / 0.31	12 / 0.47	14 / 0.55	16 / 0.63
Screw- L/D-ratio		22	19.7	16.9	14.6
Max. stroke volume (theoretical)	in ³	0.06	0.27	0.37	0.49
Max. shot weight in PS (theoretical)	oz	0.04 (POM)	0.14	0.20	0.26
Injection force	US Tons	1.38	3.89	3.89	3.89
Injection flow (theoretical)	oz/s	0.21	0.90	1.23	1.61
Max. spec. injection pressure	psi	36,753	45,377	33,330	25,527
Max. screw stroke	mm / inch	20 / 0.79	40 / 1.57	40 / 1.57	40 / 1.57
Nozzle force / contact pressure	US Tons	1.1	2.20	2.20	2.20
Nozzle retraction stroke	mm / inch	100 / 3.94	100 / 3.94	100 / 3.94	100 / 3.94
Screw torque	ft / lbf	9.2 (362.6 psi)	36.9 (1,071 psi)	55.3 (1,643 psi)	73.7 (2,143 psi)
Screw speed (infinitely variable)	rpm	max. 340	max. 340	max. 340	max. 340
Screw pulback force	US Tons	0.55	0.55	0.55	0.55
Heating power (nozzle + cylinder)	W	1335	1825	1825	1825
Hopper capacity	US gal.	0.79	0.79	0.79	0.79

Clamping unit

Clamping force	US Tons	11	11
Distance between tie bars	inch (h x v)	6.30 (diagonal 8.07)	6.30 (diagonal 8.07)
Max. daylight between platen	inch	9.84 (optional 7.87)	9.84 (optional 7.87)
Max. opening stroke (adjustable)	mm / inch	150 / 5.91	150 / 5.91
Min. mould height	inch	3.94 (optional 1.97)	3.94 (optional 1.97)
Max. mould weight on moveable clamping side	lb	48.5	48.5
Mould opening force	US Tons	1.65	1.65
Mould closing force	US Tons	1.10	1.10
Ejector stroke (max.)	mm / inch	50 / 1.97	50 / 1.97
Ejector force pushing / pulling	US Tons	0.92 / 0.92	0.92 / 0.92

General

Installed driving power / total power	kW	3.0 / 4.34 (400 V)	3.0 / 4.83 (400 V)
Duration of the dry cycle (EUROMAP 6)	s – mm	1.5 – 112	1.5 – 112
Hydraulic system pressure	psi	4351	4351
Oil tank capacity	US gal.	7.40	7.40

Dimensiones and weights


		BOY XS V	
Dimensions (LxWxH) / Footprint	mm / m ²	43.3 x 22.8 x 85.0 ² / 987.2	
Total weight net (without oil)	lb	1007	
Total weight gross (pallet & foil / wooden case)	lb	1117 / 1426	
Transport dimensions / case (LxWxH) approx.	inch	- / 66.9 x 27.6 x 88.6	

1) not suitable for all materials; applicability on request


2) max. 89 in



Procan ALPHA®




Automation



Multi Component



Made in Germany



The specified efficiency classification is achievable depending on the respective machine equipment.

Equipment

Injection unit

Pivoting injection unit	–
Preset screw speed values with ramping transition	■
Cold start protection	■
Number of set points of injection speed	8
Number of set points of injection pressure	2
Start of holding pressure dependent on hydraulic pressure, stroke and time	■
Start of holding pressure, cavity pressure-dependent	□
Number of set points of holding pressure	8
Production monitoring at start of holding pressure	■
Closed loop control for the complete injection profile and back pressure	■
Control for intrusion-injection	–
PID microprocessor-controlled heating zones for cylinder + nozzle set and temp. display	2+1 □
Hydraulically actuated needle shut-off nozzle (pneumatic for XS-LSR)	○
Slide-away for quick material change (25/35/60 VV / 35 HV / 2C M without hopper)	–
Automatic material loader / feeder	□
Adjustable nozzle force	■
Delayed nozzle retraction	■
Servo-electric screw drive (separate feed line required)	–
High wear-resistant plasticizing units	–
High wear-resistant EconPlast unit	–
Speed injection	–

Clamping unit

Reduced mould height by 50 mm	□
Moving platen support to improve the precision when using large moulds	–
Number of set points of mould closing speed / opening speed	8/8
Number of reopening attempts after mould closing	■
Hydr. ejector with dig. adjustable pressure, speed, position + no. of strokes, intermediate stop position	■
Hydraulic ejector with adjustable stroke 50 mm	■
Hydraulic ejector with adjustable stroke 130 mm	–
Hydraulic ejector with adjustable stroke 150 mm and 42,7 kN force	–
Hydraulic unscrewing device, one or two directions of rotation with intermediate stop	–
Hydraulic unscrewing device, two directions, proportional valve and pulse generator	–
Core pull control with 4/3 way directional control valve and freely selectable operational programmes	□/–
Injection compression (coining) and breathing with mould degassing control	–
Hydraulic guard safety device	■
Self adjusting mechanical drop bar safety system with electronic monitor	■
Safety gate for handling devices	–
Electronically operated safety gate	–
Selection flap	–
Air ejection	□
Mould lifting crane	–
Simultaneous ejector movement (with double pump)	–
Integrated sprue picker	–

Electronics

USB interface for access and data exchange	■
Interface kit: Serial/Temperature device, USB/Printer and Ethernet	□
OPC interface	□
4 freely programmable inputs/outputs	□
Piece counter / interval signal	■
Preselect cycle counter with auto shut-off	■
Grounded socket outlet 230 V ~ / 10 A (alternatively can be switched off)	■(–)
CEE socket outlet 400 V ~ / 16 A (alternatively can be switched off)	–(–)
Socket distributor 400 V ~ / 230 V ~ switched (separate feed line required)	–
Energy distributor with four fixed connections, up to 5 x 400 V CEE + 3 x 230 V (sockets can be switched off optionally). Standard supply 125 A / 5 x 50 mm²	–
Switch cabinet ventilation	■
Standardized interface for handling units (EUROMAP 67)	□
Separate feeder (heating and motor current)	–
7-day timer	■
Additional temperature control	□
Brush control	□
Connector for safety switch to inhibit mould closing	□
Integrated hot runner control, 8/16-fold (separate feed line required)	–
Air conditioning unit for control cabinet	–
Alarm signal with sound	□

Hydraulics

Electronically controlled variable pump	■
Servo-motor pump drive (Servo-drive)	–
Oil preheating circuit automatic	■
Oil temperature gauge / Controlled oil cooling / Oil level indicator	■
Oil level and temperature monitoring	■
Optical oil filter contamination indicator	–
Proportional action valve for the clamping unit	–
Proportional valve with stroke feedback and positioning action for clamp unit	–

General

Cooling water distributor with electric shut-off valve for injection mould	–
Temperature control for feed throat	□
6- / 8-zone water distributor	–
Tool kit	■
Spare parts package	□
Oil filling	□
Anti-vibration mounts	■

■ standard ○ alternatively □ optional – not available

You would like to learn more about this BOY injection moulding machine?



Data and Equipment (complete overview)



Competence brochure

BOY
Spritzgiessautomaten

Boy Machines, Inc.
199 Philips Road
Exton, Pennsylvania 19341

Phone: (610) 363-9121
Fax: (610) 363-0163
sales@boymachines.com
www.boymachines.com



BOY-APP
free of charge at
<http://app.dr-boy.de>

