




Innovative into the Future – BOY-Injectioneering

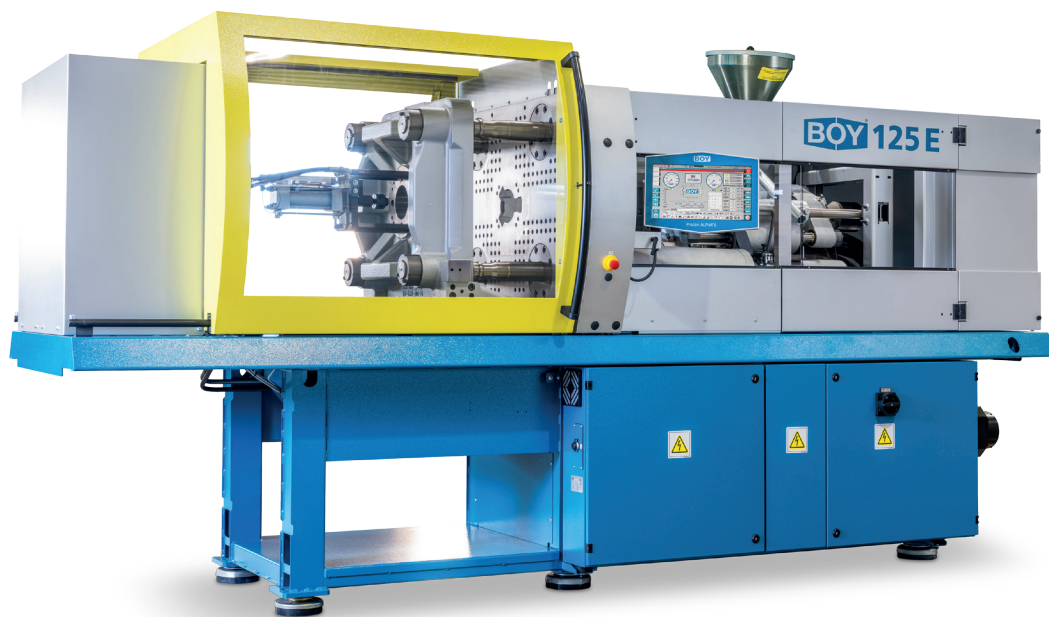

Injection molding machine BOY 125 E

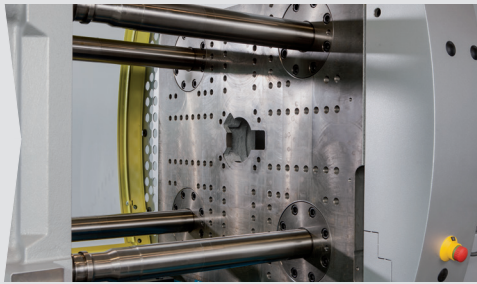

Tie bar distances enlarged to 470 mm x 430 mm

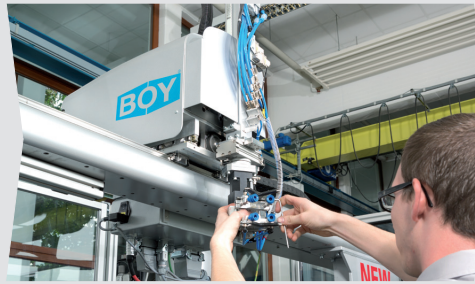

Simplest possibilities to integrate a four-axis industrial robot



Electrically driven material hopper / feeder for an easier refilling / assembly

- Fully controlled
- Four-tie bar, two-platen clamping unit with a max. platen distance of 825 mm
- Patented pressure intensifier with **integrated valve function**
- Most exact positioning of the moving platen via proportional valve and servo drive technology
- Divided safety gate for the clamping unit
- Easily accessible ejector
- Optimum L/D ratio of the screw
- **Different injection units** for thermoplastic, thermoset, LSR, and elastomer processing
- **Lateral swivel-out** injection unit
- Robust machine frame with integrated oil tank
- Optional with energy-efficient and high wear-resistant **EconPlast** unit

Significantly stronger, larger and more powerful, were the requirements for the development of BOY 125 E. In addition to the larger tie bar distance of 470 mm and a maximum platen distance of 825 mm, the new BOY top model offers a clamping force increase of 25%. **1,250 kN clamping force** characterizes now the new machine upper limit at BOY.

Given the easy handling of the machine, the users of the BOY 125 E enjoy **maximum flexibility**. All components - from the injection unit to the four-tie bar clamping system - **are easily accessible**. The divided safety gate of the clamping unit is easy to open and offers **optimum accessibility** of the mold, which entails short set-up times and a rapid start of production.


Powerful software applications of the **Procan** series can be chosen for the control of the injection molding machine. Clearly designed menu structures offer **maximum ease of operation** with optimum results. A multitude of **thermo-plastics, elastomers, silicones** and **thermosets** as well as **metals** and **ceramics** (PIM-Technologie) can be processed trouble-free.

Despite the many intelligent, balanced components and a multitude of optional equipment, the injection molding machine from BOY makes do with **little floor space** (just under 5.22 square metres).

It also stands for **efficiency** and an unparalleled price/performance ratio. Compared to the competitors, the **material throughput** of the BOY 125 E is markedly higher than that of comparable machines. Available options include controls for handling devices, picker as well as brush units, unscrewing devices, core pulls, and integrated hot runner controls.



- 1 The machine design features the best ergonomics and efficient operation.
- 2 For an easier refilling the material hopper / -conveying device are electrically driven.
- 3 Precise support for large / heavy moulds up to 680 kg on the moving locking side.
- 4 Optimum control technology with intuitive operation concept.
- 5 Stable machine design with integrated oil tank.

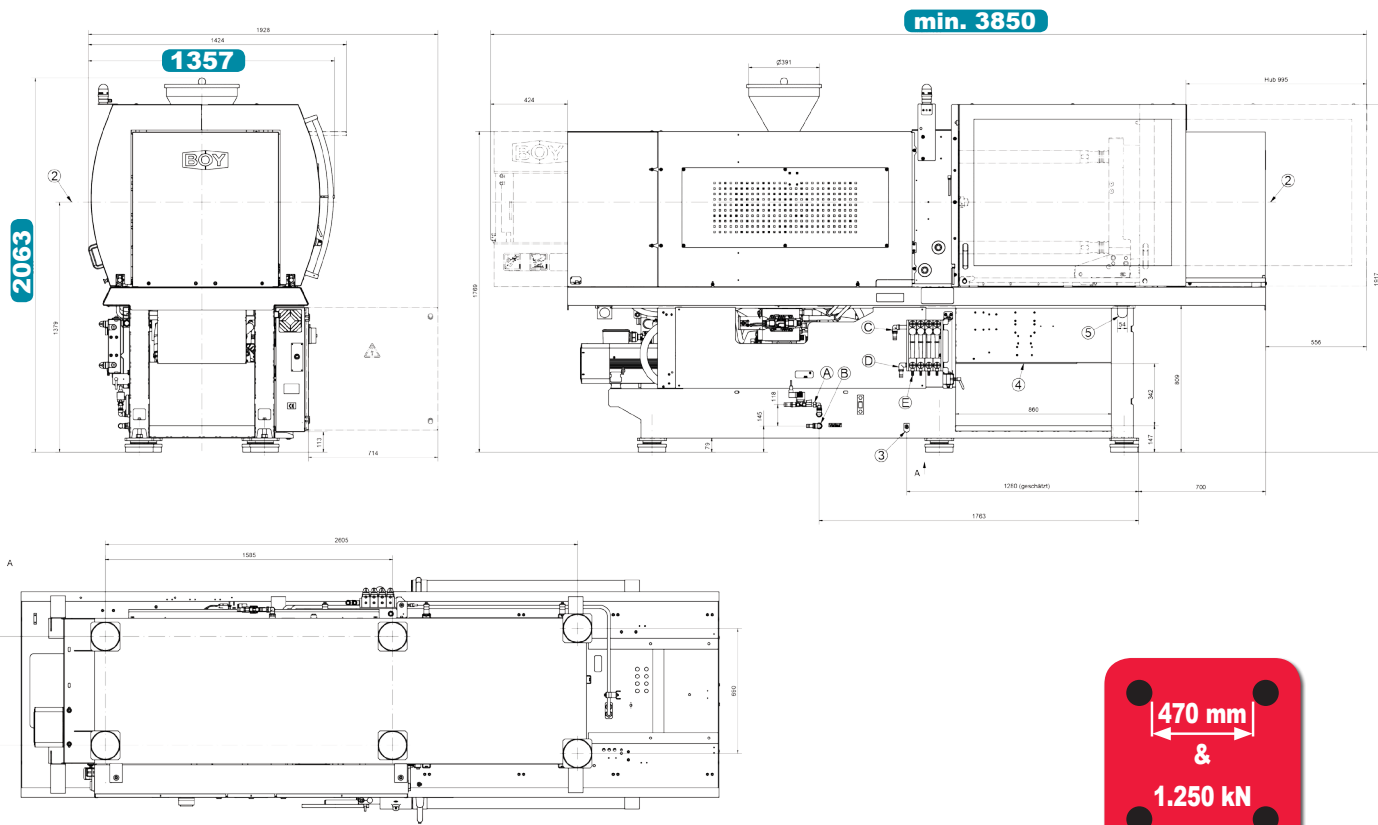

BOY 125 E

Technical Data – standard version¹⁾

Injection unit for processing thermoplastics		SP 420 (Standard)			
Screw diameter	mm	36	42	48	52
Screw- L/D-ratio		23	20	17	16
Max. stroke volume (theoretical)	in ³	9.94	13.53	17.67	20.74
Max. shot weight in PS (theoretical)	oz	5.23	7.12	9.29	10.91
Injection force	US Tons	29.6			
Injection volume flow	in ³ / sec	13	17.8	23.2	27.2
Max. spec. injection pressure	psi	37478	27543	21088	17970
Max. screw stroke	mm / in	160 / 6.3			
Nozzle force / contact pressure	US Tons	7.31			
Nozzle retraction stroke	mm / in	243 / 9.57			
Screw torque	ft / lbf	368.78 (18.3 in ³ / 1885 psi) / 390.91 (21.2 in ³ / 1885 psi)			
Screw speed (infinitely variable)	rpm	280 (18.3 in ³) / 250 (21.2 in ³)			
Screw pulback force	US Tons	5.96			
Heating power (nozzle + cylinder)	W	11250			
Hopper capacity	Us gal.	5.28			
Injection speed	in / sec	8.27			

Clamping unit		
Clamping force	US Tons	140.51
Distance between tie bars	in (h x v)	18.5 x 16.93
Max. daylight between platen	mm / in	825 / 32.48
Max. opening stroke (adjustable)	mm / in	525 / 20.67
Min. mold height	mm / in	300 / 11.81
Max. mold weight on moveable clamping side	lb (max)	1499.14
Mold opening force	US Tons	5.45
Mold closing force	US Tons	5.53
Ejector stroke (max.)	mm / in	130 / 5.12 (150 / 5.91)
Ejector force pushing / pulling	US Tons	2.29 / 1.52 (4.8 / 3.37)

General		
Total power	V / Amps / 3 phase	460 V / 80 A / 3 phase
Duration of the dry cycle (EUROMAP 6)	s (mm)	2.5 (329)
Hydraulic system pressure	psi	2785
Oil tank capacity	US gal.	58.12

Dimensiones and weights		BOY 125 E
Dimensions (LxWxH) / Footprint	in / square in	151.57 x 53.43 x 81.22 / 8098
Total weight net (without oil)	lb	10362
Total weight gross (pallet & foil / wooden case)	lb	13448 / 14440
Transport dimensions / case (LxWxH) approx.	in	154.7 x 63.0 x 85.4 / 157.5 x 63.0 x 85.4

1) more injection units see Technical Data and Equipment




Servo-Drive




Control




EconPlast




Automation



Multi Component



E-Drive

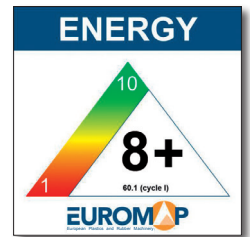

The specified efficiency classification is achievable depending on the respective machine equipment.

Equipment

Injection unit

Pivoting injection unit	■
Preset screw speed values with ramping transition	■
Cold start protection	■
Number of set points of injection speed	9
Number of set points of injection pressure	9
Start of holding pressure dependent on hydraulic pressure. stroke and time	■
Start of holding pressure, cavity pressure-dependent	□
Number of set points of holding pressure	9
Production monitoring at start of holding pressure	■
Closed loop control for the complete injection profile and back pressure	■
Control for intrusion-injection (not for BOY 2C XS)	■
PID microprocessor-controlled heating zones for cylinder + nozzle set and temp. display	■
Hydraulically actuated needle shut-off nozzle (pneumatic for XS-LSR)	●
Slide-away for quick material change (25 + 35 + 60 VV / 35 HV / 2C M without hopper)	■
Automatic material loader / feeder	□
Adjustable nozzle force	■
Delayed nozzle retraction	■
Servo-electric screw drive (separate feed line required)	●
High wear-resistant plasticizing units	●
High wear-resistant EconPlast unit	●
Speed injection (not for BOY 2C XS)	-
Clamping force build-up can be activated parallel to injection	-
Electromechanical injection movement	-

Clamping unit

Reduced mold height by 50 mm	□
Moving platen support to improve the precision when using large molds	■
Number of set points of mold closing / opening speed	9
Number of reopening attempts after mold closing	■
Hydr. ejector with adjustable pressure, speed, position + no. of strokes, intermediate stop position	■
Hydraulic ejector with adjustable stroke 80 mm (for XS E = 50 mm)	-
Hydraulic ejector with adjustable stroke 130 mm	■
Hydraulic ejector with adjustable stroke 150 mm and 42.7 kN force	●
Electromechanical ejector 150 mm	●
Hydraulic unscrewing device, one or two directions of rotation with intermediate stop	□
Hydraulic unscrewing device, two directions, proportional valve and pulse generator	□
Core pull control with 4/3 way directional control valve and freely selectable operational programs	□
Injection compression (coining) and breathing with mold degassing control	□
Hydraulic guard safety device	■
Self adjusting mechanical drop bar safety system with electronic monitor	□
Safety gate for handling devices	■
Electronically operated safety gate	-
Selection flap	●
Air ejection	□
Mold lifting crane	-
Simultaneous ejector movement (with double pump/Electric)	□
Integrated sprue picker	□
Mold holder 75 x 75 mm	-

Electronics

USB interface for access and data exchange	■
Interface kit: Serial/Temperature device, USB and Ethernet	□
OPC interface	□
4 freely programmable inputs/outputs	□
Piece counter	■
Preselect cycle counter with auto shut-off	■
Grounded socket outlet 230 V ~ / 10 A, (alternatively switched)	■(□)
CEE socket outlet 400 V ~ / 16 A (alternatively switched)	- (-)
Socket distributor 400 V ~ switched + 230 V ~ (Standard supply 32 A)	-
Socket distributor 400 V ~ / 230 V ~ switched (separate feed line required)	□
Energy distributor with four fixed connections, up to 5 x 400 V CEE + 3 x 230 V (sockets can be switched off optionally). Standard supply 125 A / 5 x 50 mm ²	□
Switch cabinet ventilation	■
Standardized interface for handling units EUROMAP 67	□
Separate feeder (heating and motor current)	■
7-day timer	■
Additional temperature control	□
Brush control	□
Connector for safety switch to inhibit mold closing	□
Integrated hot runner control, 8/16-fold (separate feed line required)	□
Air conditioning unit for control cabinet	□
Alarm signal with sound	□

Hydraulics

Electronically controlled variable pump	-
Servo-motor pump drive (Servo-drive)	■
Oil preheating circuit automatic	■
Oil temperatur gauge / Controlled oil cooling / Oil level indicator	■
Oil level and temperature monitoring	■
Proportional valve with stroke feedback and positioning action for clamp unit	■

General

Cooling water distributor with electric shut-off valve for injection mold	●
Temperature control for feet throat	□
6- / 8-zone water distributor	●
Tool kit	□
Spare parts package	□
Oil filling	□
Anti-vibration mounts	■

■ standard ● alternatively □ optional - not available

You would like to learn more about this BOY injection molding machine?



Technical Data and Equipment (complete overview)



Competence brochure



Boy Machines, Inc.
199 Philips Road
Exton, Pennsylvania 19341

Phone: (610) 363-9121
Fax: (610) 363-0163
sales@boymachines.com
www.boymachines.com



BOY-APP
free of charge at
http://app.dr-boy.de

